



Datasheet

Switching Spark Gap (SSG)

Series / Models	2RK-5 Series
Product Code	10.12.52.XXXX 10.12.53.XXXX
Version	A4
Date	2026-03-02
File Number	SP-SSG-003

Switching Spark Gap (SSG)

2RK-5 Series

Version History

Version	Date	Page	Description	Author
A0	2016-06-25	/	Initial draft	George Hu
A1	2020-03-31	Page 4,5	Update electrical characteristics	George Hu
A2	2024-11-04	Page 10	Update packaging information	George Hu
A3	2025-06-13	Page 1,2,3,4	1. Add cover and version history 2. Update Description 3. Delete some models	Xia Wu
A4	2026-03-02	All	1. Update file number 2. Update the packaging quantity for the DIP axial lead series (bulk)	Xia Wu

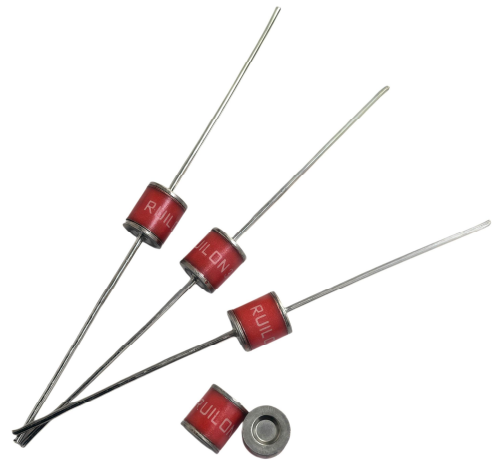
Switching Spark Gap (SSG)

2RK-5 Series

Description

The principle of gas discharge is used not only for overvoltage protection but also in switching applications. Ignition performance is determined to a large degree by the properties of the switching component. An extremely fast switch is called for, which operates virtually without loss and with high insulation resistance in the non-conducting state. It should also be as compact as possible, rugged, highly reliable, and capable of operating over a wide temperature range.

The 2RK-5 series switching spark gap (SSG) is a device that offers axial leads or surface mount packaging. It is not only small in size and easy to install on various compact printed circuit boards (PCBs), but also has excellent performance. Unlike gas discharge tubes, switching spark gaps (SSGs) are active components that work reliably even after igniting hundreds of thousands of times. They can be used in all applications where high voltage pulses are generated, for example to ignite modern high-pressure gas discharge lamps such as xenon lamps in automotive headlights.




Features

- I Extremely long life time
- I Stable performance over life
- I Insensitive performance against variations in temperature
- I Low switching losses
- I Very short breakdown time
- I High reliability by robust design
- I Non-Radioactive

Applications

- I Igniters for architectural and automotive Xenon discharge lamps
- I Electronic igniters for gas heating and gas domestic appliances, e.g., cookers
- I Ignition of ultra-high pressure gas discharge lamps for data and video projectors

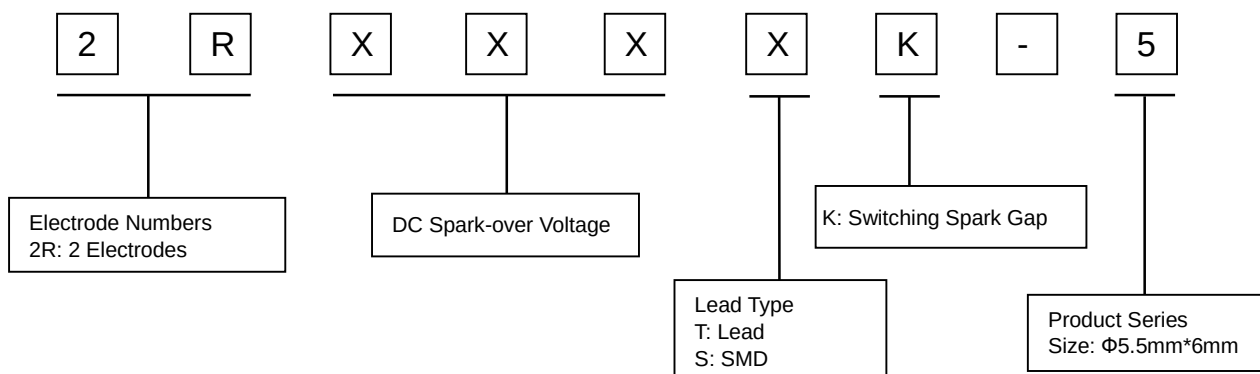Part Number Code



Switching Spark Gap (SSG)

2RK-5 Series

Electrical Characteristics

Part Number	2R350TK-5 2R350SK-5	2R400TK-5 2R400SK-5	2R600TK-5 2R600SK-5	Units
Initial Values				
Static Breakdown Voltage V_S @100V/S ¹⁾				
First ignition Value after 24 hours in darkness	<420	<480	<720	V
Following Ignition Values	315~385	360~440	540~660	V
Electrical Life Time				
Breakdown Voltage V_B ²⁾				
First ignition Value after 24 hours in darkness	<435	<500	<750	V
Following Ignition Values	300~405	340~460	510~690	V
Switching Operations @ +25°C	10 ⁵	10 ⁵	10 ⁵	Ignitions
Breakdown Time	<50	50	<50	ns
Maximum Switching Frequency	200	200	200	Hz
Test Circuit Parameters				
Open Circuit Voltage V_0	450	520	750	V
Loading Resistance R	10	10	13	KΩ
Discharge Capacitance C	680	680	470	nF
Inductance L	0.5	0.5	0.1	μH
Discharge Peak Current I_P	~500	~500	~600	A
Insulation Resistance @100 V	>10 ⁸	>10 ⁸	>10 ⁸	Ω
Capacitance @1MHz	<1	<1	<1	pF
Weight	DIP	~0.82	~0.82	g
	SMD	~0.55	~0.55	g
Operation and storage temperature		-40~+125	-40~+125	°C
Climatic category (IEC60068-1)		40/125/21	40/125/21	
Marking, red negative		RUILON 350K Y	RUILON 400K Y	RUILON 600K Y
Surface treatment	DIP	Nickel Plated		
	SMD	Matte-tin plated		
Moisture sensitivity level ³⁾		1		

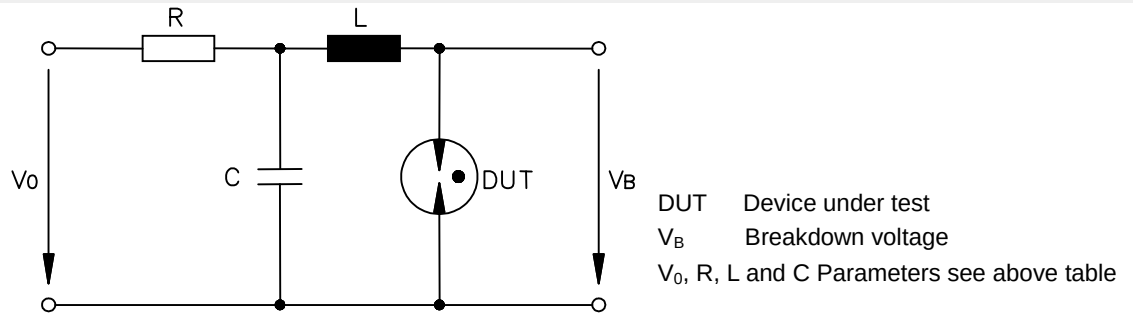
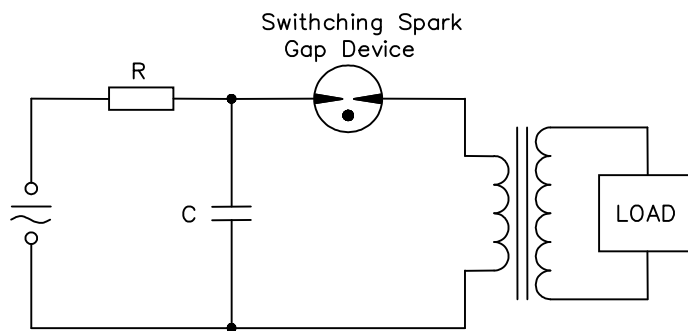
¹⁾ At delivery AQL 0.65 level II, DIN ISO 2859.

²⁾ Fig. 1.

³⁾ Tests according to JEDEC J-STD-020.


Switching Spark Gap (SSG)

2RK-5 Series


Test Circuit Fig. 1

Basic Application Circuit Fig. 2

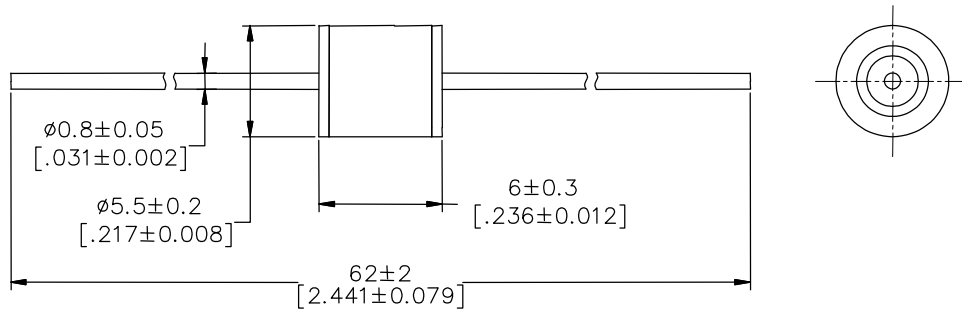
Dimensions (Unit: mm/inch)

DIP axial leads series (2RxxxTK-5)

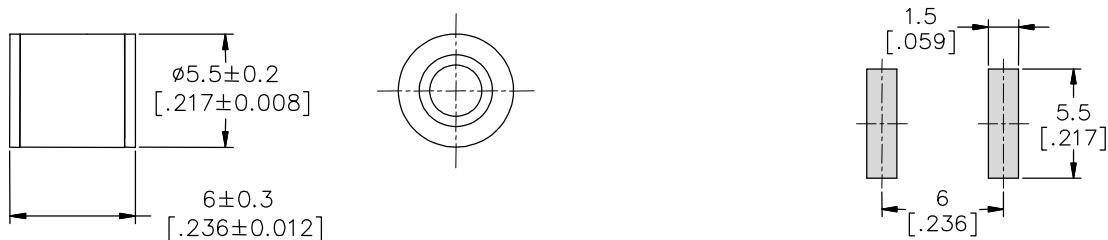

SMD Series (2RxxxSK-5)



Recommended Soldering Pad Layout

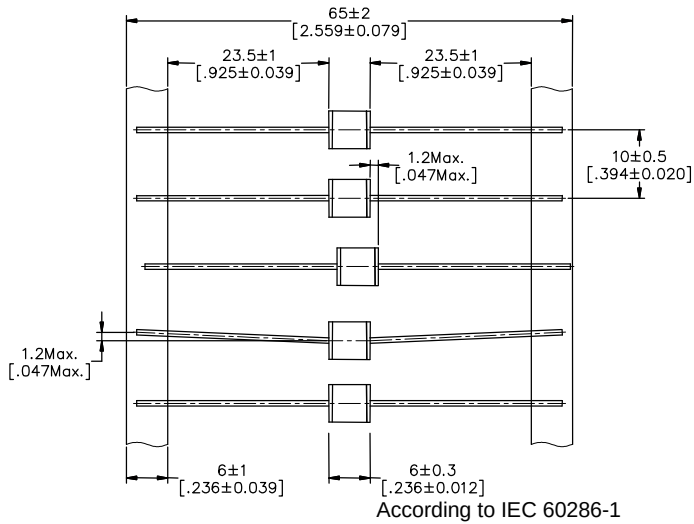
Switching Spark Gap (SSG)

2RK-5 Series


Packaging Information (Unit: mm/inch)



DIP axial leads series packaging (Default packaging)

Tape



Reel



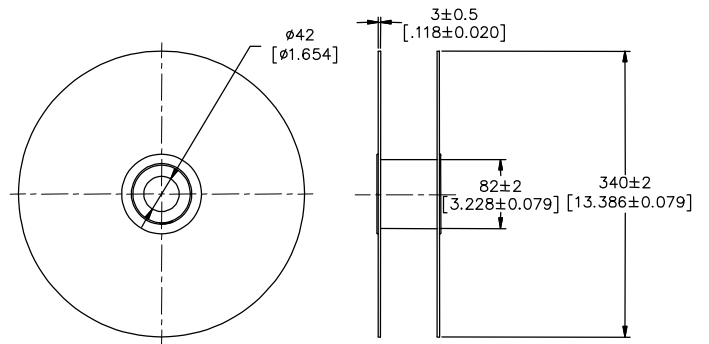


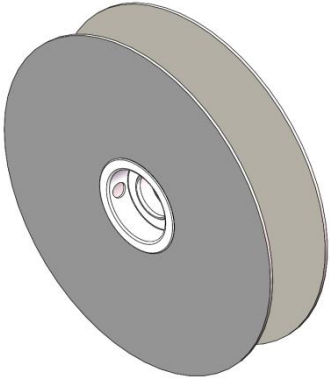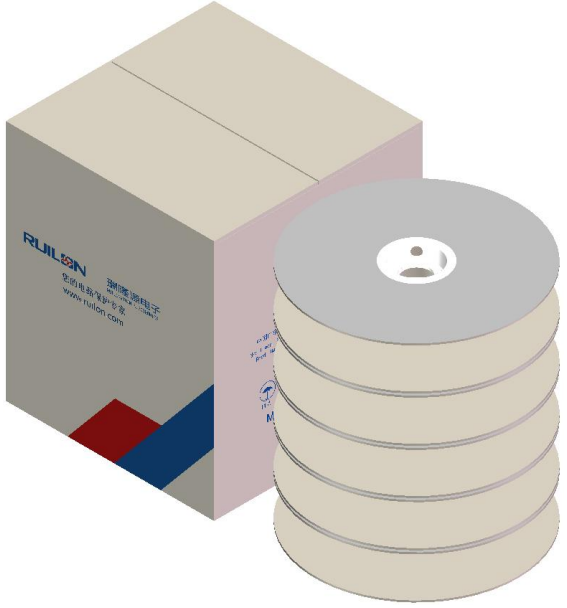	Reel	Carton
Size	340×78mm	350×350×407mm
Quantity	MPQ/MOQ: 1 reel=1,000pcs	1 Carton=5 reels =5,000pcs
Photos		

Switching Spark Gap (SSG)


2RK-5 Series

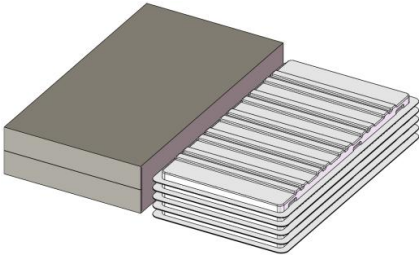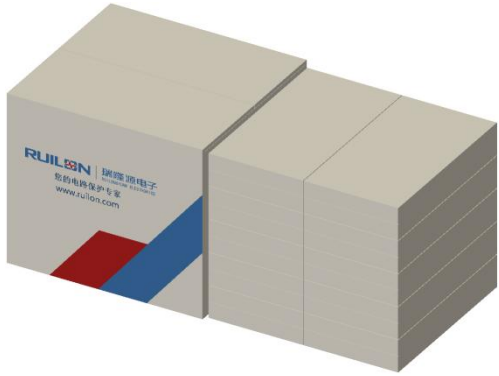DIP axial leads series packaging (Bulk)

	PVC tray	Inner Box	Carton
Size	265×148×10mm	275×150×50mm	315×290×272mm
Quantity	MPQ: 1 tray=100pcs	MOQ: 1 Inner Box=6 trays=600pcs	1 Carton=10 Inner boxes=6,000pcs
Photos			

SMD Packaging (Tape & Reel)

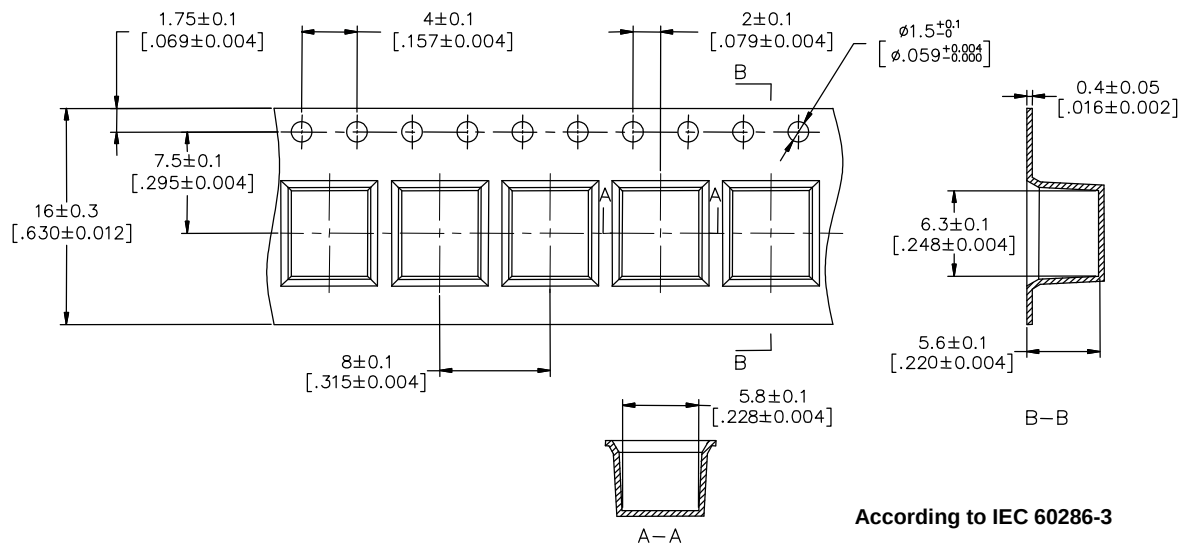
Tape






Switching Spark Gap (SSG)

2RK-5 Series

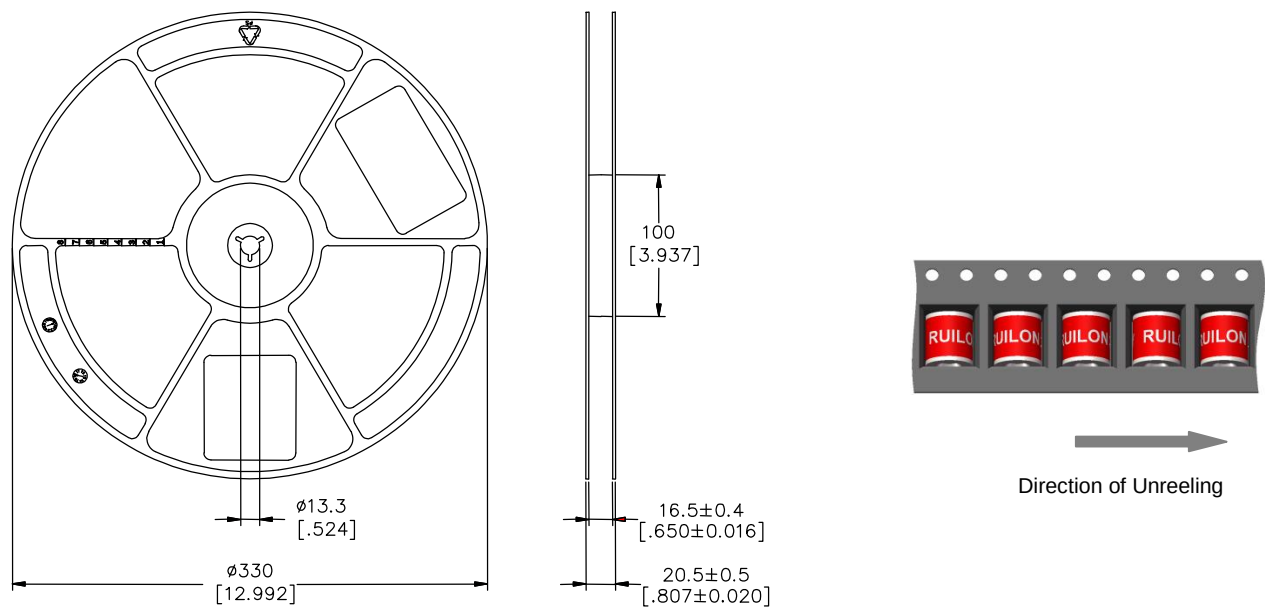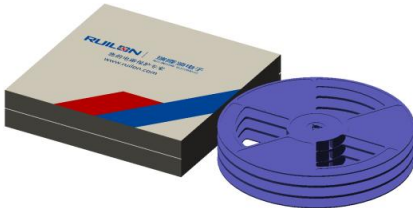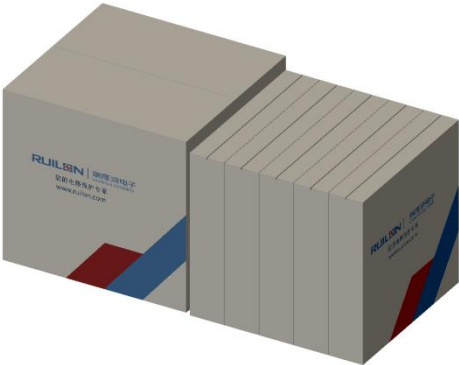Reel




	Reel	Inner Box	Carton
Size	330×20.5mm	340×333×70mm	375×353×380mm
Quantity	MPQ/MOQ: 1 reel=1,000pcs	1 Inner Box=3 reels=3,000pcs	1 Carton=5 Inner boxes=15,000pcs
Photos			

Switching Spark Gap (SSG)


2RK-5 Series

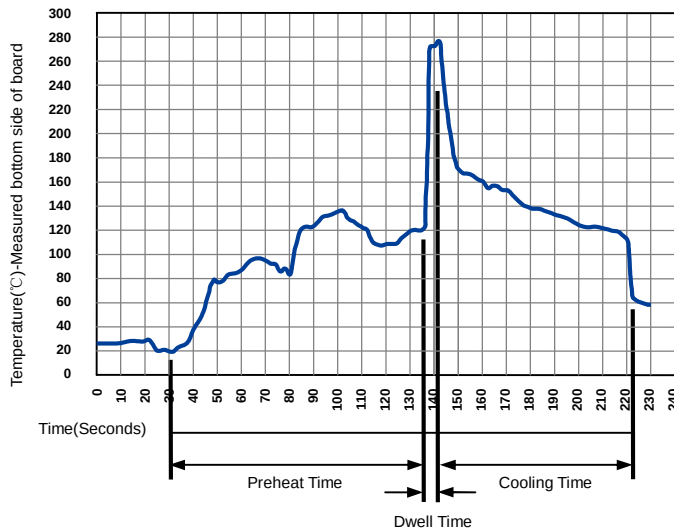Soldering Parameters - Wave soldering (Thru-Hole Devices)



Wave Soldering Condition		Pb-Free assembly
Preheat	Temperature Min	100°C
	Temperature Max	150°C
	Time (Min to Max)	60-180 Seconds
Solder Pot Temperature		280°C Max
Solder Dwell Time		2-5 Seconds

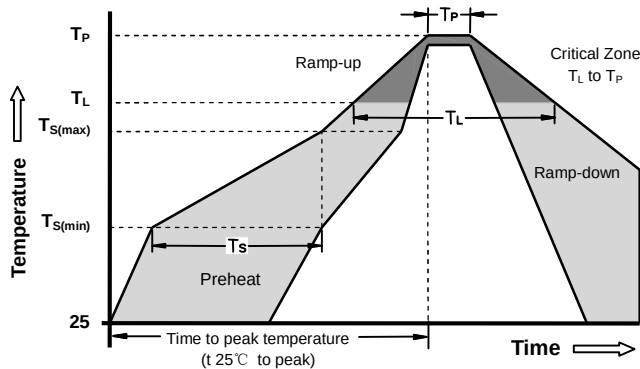Soldering Parameters - Reflow Soldering (Surface Mount Devices)



Reflow Condition		Pb - Free assembly
Preheat	-Temperature Min ($T_{S(min)}$)	150°C
	-Temperature Max ($T_{S(max)}$)	200°C
	- Time (min to max) (t_s)	60 -180 Seconds
Average ramp up rate (Liquids Temp T_L) to peak		3°C/second max
$T_{S(max)}$ to T_L - Ramp-up Rate		5°C/second max
Reflow	- Temperature (T_L) (Liquids)	217°C
	- Time (min to max) (t_s)	60 -150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5°C of actual peak Temperature (t_p)		10 - 30 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max
Do not exceed		260°C

Cautions

- I Switching spark gaps may be used only within their specified values.
- I Damaged switching spark gaps must not be re-used.
- I The electrical characteristics described in this datasheet are only typical characteristics, and all of these characteristics have been confirmed through testing and inspection. If the customer's usage requirements are different from this or have special requirements, please contact Ruilongyuan Electronics Co., Ltd. If protection failure or circuit damage occurs as a result, our company is not responsible for it.
- I Ruilongyuan Electronics Co., Ltd. always strives to improve our products. Consequently, the products described in this datasheet may be updated from time to time, and the corresponding product specifications may also be updated accordingly. So, before or at the time of placing your order, please check to what extent the product descriptions and specifications contained in this publication are still applicable. Ruilongyuan Electronics Co., Ltd. still reserves the right to cease production and delivery of products. Consequently, we cannot guarantee that all products listed in this datasheet will always be available. The above provisions do not apply to individual agreements with customers for specific products.
- I Ruilongyuan Electronics Co., Ltd. models may have different product codes. Different product code representations are due to the use of different production processes, but do not affect their respective product specifications.